


PA_Tiefpassfilter_12/10m

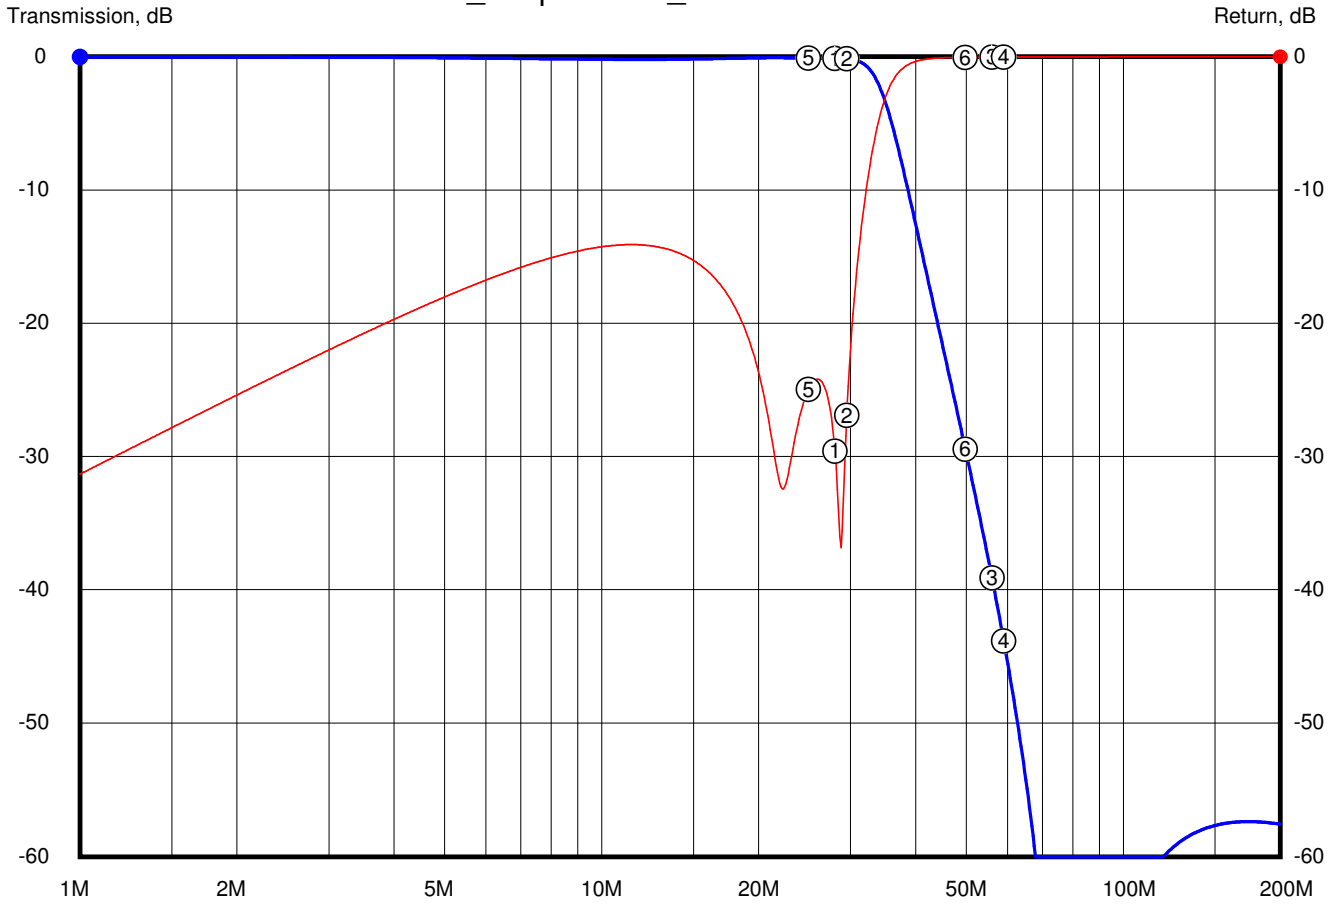

Details of markers:

Frequency:	Trans.:	Angle:	Return:	Delay:	VSWR:	Zin:	Zangle:	Real:	Imaginary:
1 28M	-0,12075	172,77	-29,563	27,61n	1,0688	51,337	3,4966	51,242	-3,131
2 29.5M	-0,15005	156,78	-26,882	31,5n	1,0949	52,845	-4,106	52,71	3,7838
3 56M	-39,07	-23,846	-0,02072	4,354n	838,6	32,848	89,851	0,08535	-32,848
4 59M	-43,806	-28,109	-0,01709	3,64n	>1000	30,096	89,872	0,06702	-30,096
5 24.9M	-0,10064	-159,09	-24,951	23,23n	1,1199	54,155	4,5908	53,982	-4,3345
6 49.8M	-29,425	-11,957	-0,03654	6,656n	475,46	41,182	89,754	0,1765	-41,181