


PA_Tiefpassfilter_30/20m

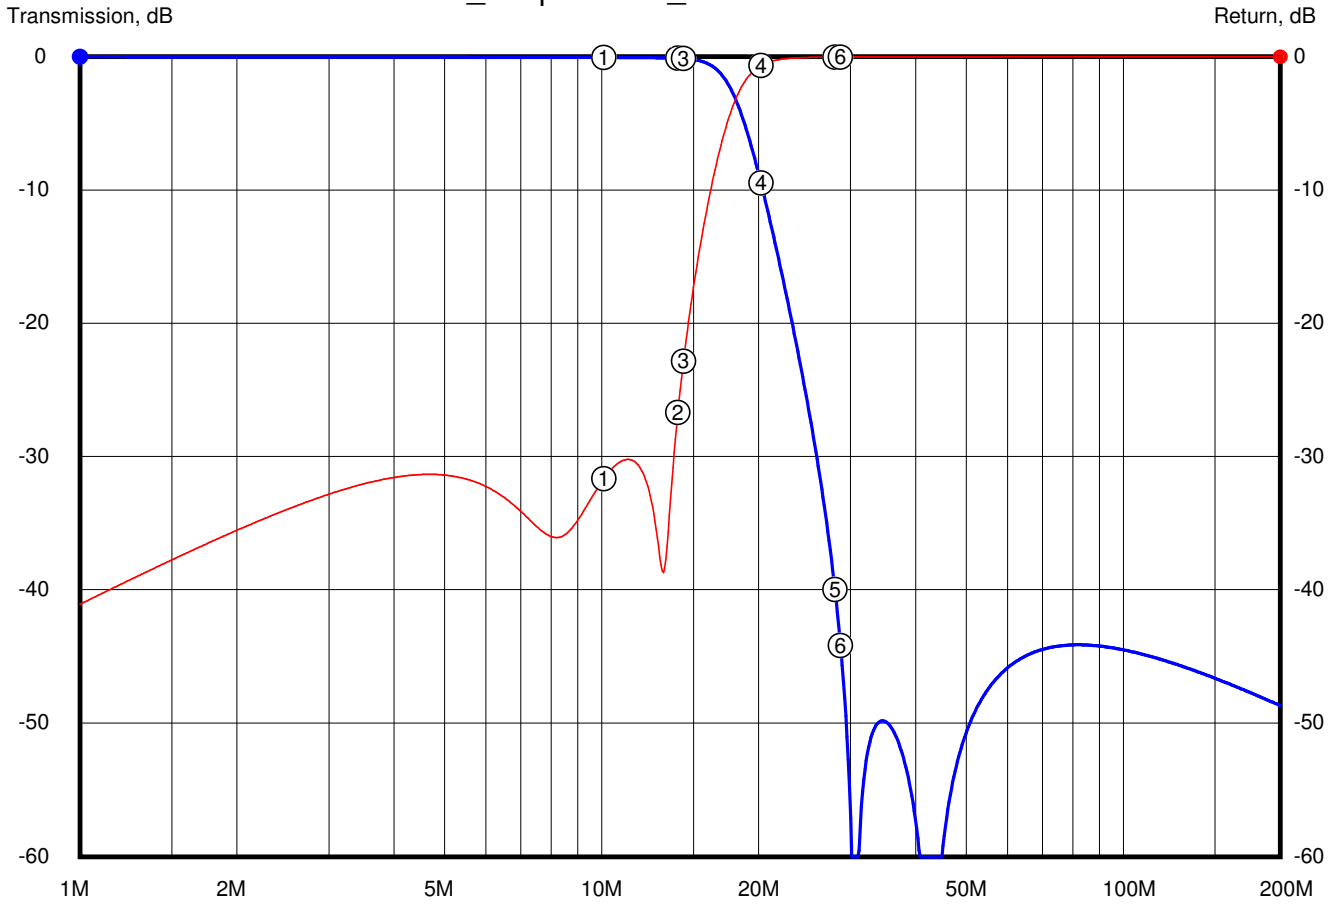

Details of markers:

Frequency:	Trans.:	Angle:	Return:	Delay:	VSWR:	Zin:	Zangle:	Real:	Imaginary:
1 10.1M	-0,05153	-100,2	-31,63	32,22n	1,0538	51,897	2,1149	51,861	-1,9151
2 14M	-0,10485	-152,6	-26,674	44,83n	1,0973	50,797	-5,2329	50,585	4,6329
3 14.35M	-0,12618	-158,41	-22,82	47,03n	1,1558	51,16	-8,1633	50,642	7,2645
4 20.2M	-9,462	75,992	-0,66154	46,13n	26,272	211,75	80,216	35,984	-208,67
5 28M	-39,929	11,002	-0,03074	10,88n	565,09	51,379	89,797	0,18191	-51,379
6 28.7M	-44,136	8,6188	-0,02807	8,344n	618,87	48,861	89,815	0,15795	-48,861